



DELTA PARED / WALL DELTA / DELTA ADOSSÉE

"DELTA"




"DELTA FREE"




MOD.	L	F	Kgs.	n° Filt.	m³/h	Ø
1000	1020	1000	32	2	2500	300
1500	1510	1000	43	3	3100	350
2000	2000	1000	53	4	3600	350
2500	2490	1000	66	5	4100	400
3000	3020	1000	87	6	4600	400
3500	3510	1000	98	7	5100	400
4000	4000	1000	109	8	5600	450
4500	4490	1000	120	9	6100	450
5000	4980	1000	135	10	6600	500
6000	6000	1000	165	12	7600	550

DELTA CENTRAL / CEILING DELTA / DELTA CENTRALE

"DELTA"

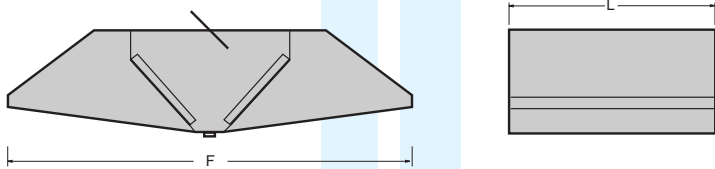


"DELTA FREE"

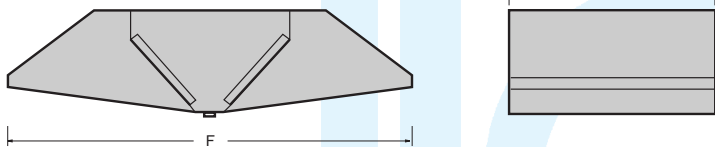

MOD.	L	F	Kgs.	n° Filt.	m³/h	Ø
2000	2000	2000	72	8	7200	500
2500	2490	2000	87	10	8100	500
3000	3020	2000	117	12	9000	550
3500	3510	2000	131	14	9900	600
4000	4000	2000	148	16	10800	600
4500	4490	2000	165	18	11700	600
5000	4980	2000	178	20	12600	700
6000	6000	2000	222	24	14400	750


DELTA PARED CON VENTILADOR / WALL DELTA WITH FAN / DELTA ADOSSÉE AVEC VENTILATEUR



MOD.	L	F	Kgs.	Vent. Fan	W	Vel. Speed Vit.	V	Max. m³/h	mm H ₂ O	Ø	n° Filt.
1000	1020	1000	48,3	9/9 T	420	R	220	2500	25	350	2
1500	1510	1000	42,4	9/9 T	420	R	220	2600	23	400	3
2000	2000	1000	53,0	9/9 T	420	R	220	2800	17	450	4
2500	2490	1000	65,2	9/9 T	420	R	220	2900	15	500	5

Ventilador con motor externo IP 55. / Fan with an IP 55 exterior motor. / Ventilateur avec moteur extérieur IP 55

PLENUM



PARED / WALL / ADOSSÉE

	A	B	C	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000
A	1000	250	532	1000	250	532	2500	300	532	3500	350	532	3500	532
B	250	250	532	1000	250	532	2500	300	532	3500	350	532	3500	532
C	532	532	532	1000	532	532	2500	532	532	3500	532	532	3500	532

CENTRAL / CEILING / CENTRALE

	A	B	C	2000	2500	3000	3500	4000	4500	5000	5500	6000
A	2000	250	1064	2000	250	1064	3000	300	1064	3500	350	1064
B	250	250	1064	2000	250	1064	3000	300	1064	3500	350	1064
C	1064	1064	1064	2000	1064	1064	3000	1064	1064	3500	1064	1064